


APO-SYMMAR 5.6/150 L


MODULATION als Funktion der relativen Bildgröße

Wellenlänge λ	[nm]	546	644	588	480	436	405
Spektrale Gewichtung	[%]	24.6	18.6	22.1	12.4	15.2	7.1
Ortsfrequenz R	[1/mm]	5	10	20			
Format	[mm X mm]	90.0	X120.0				
Diagonale $2u'$	[mm]	233.0					


radial —
tangential - -

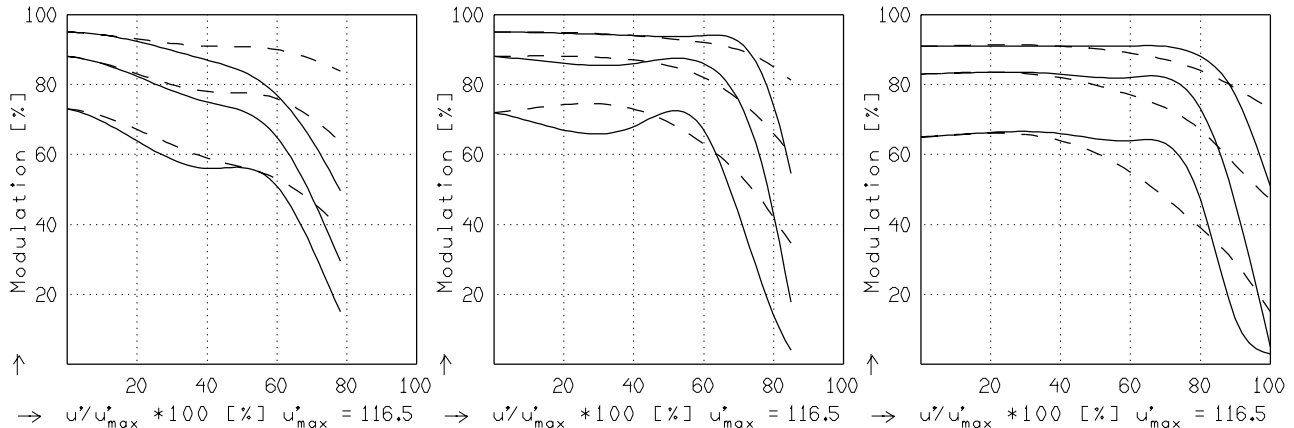

$f' = 151.5$ $k = 5.6$ $1/\beta' = \infty$ $00' = \infty$ $f' = 151.5$ $k = 11.0$ $1/\beta' = \infty$ $00' = \infty$ $f' = 151.5$ $k = 22.0$ $1/\beta' = \infty$ $00' = \infty$

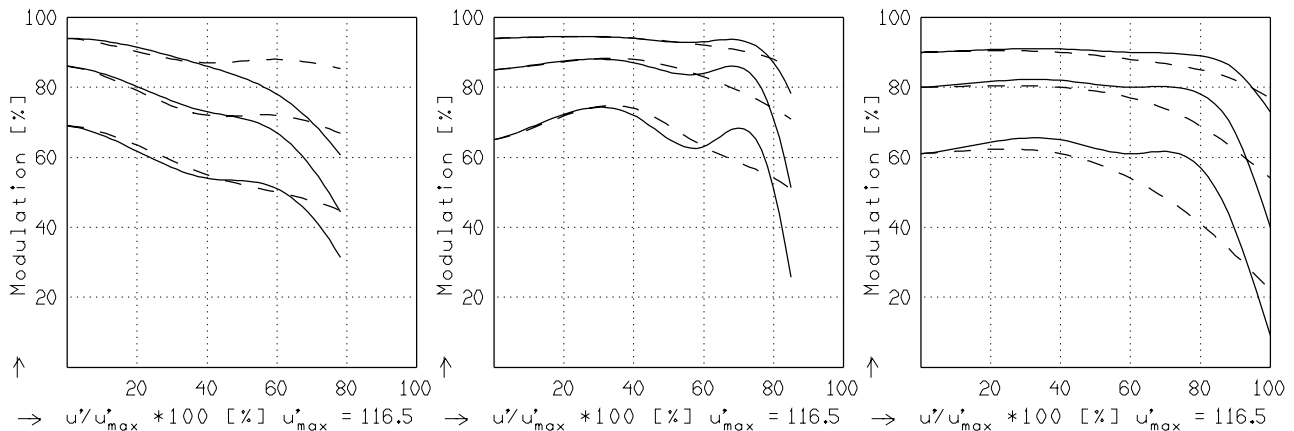

$f' = 151.5$ $k = 5.6$ $1/\beta' = -10.00$ $00' = 1830$. $f' = 151.5$ $k = 11.0$ $1/\beta' = -10.00$ $00' = 1830$. $f' = 151.5$ $k = 22.0$ $1/\beta' = -10.00$ $00' = 1830$.

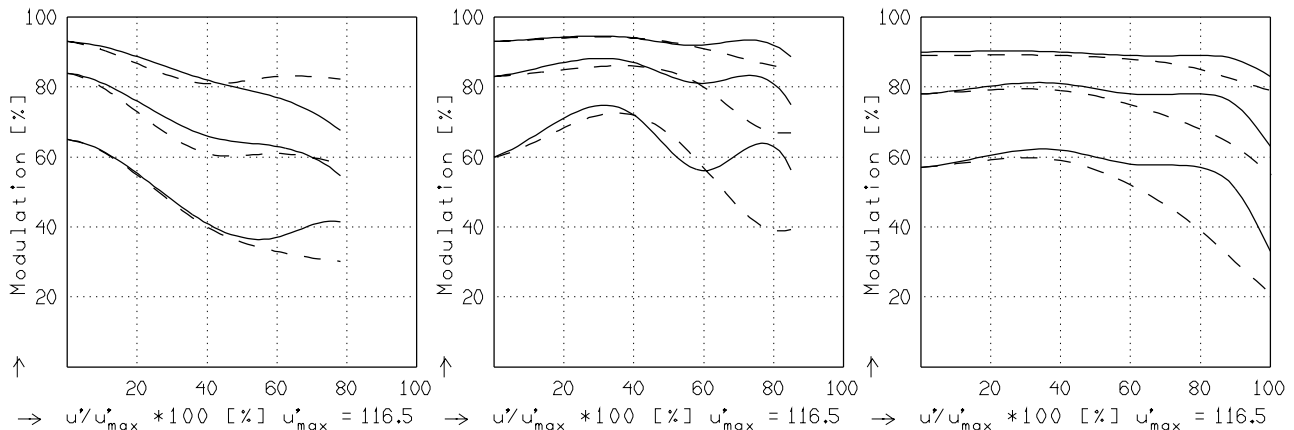

$f' = 151.5$ $k = 5.6$ $1/\beta' = -5.00$ $00' = 1087$. $f' = 151.5$ $k = 11.0$ $1/\beta' = -5.00$ $00' = 1087$. $f' = 151.5$ $k = 22.0$ $1/\beta' = -5.00$ $00' = 1087$.

Fokussierung MTF_{max} bei $k = 5.6$, $R = 20$ 1/mm. $u'/u'_{max} = 0$

47555 181102 Gedruckt in der Bundesrepublik Deutschland