


APO-SYMMAR 5.6/180 L


MODULATION als Funktion der relativen Bildgröße

Wellenlänge λ [nm] :	546	644	588	480	436	405
Spektrale Gewichtung [%] :	24.6	18.6	22.1	12.4	15.2	7.1
Ortsfrequenz R [1/mm] :	5	10	20			
Format [mm X mm] :	130.0	X180.0				
Diagonale $2u'$ [mm] :	277.0					


radial —
tangential - -

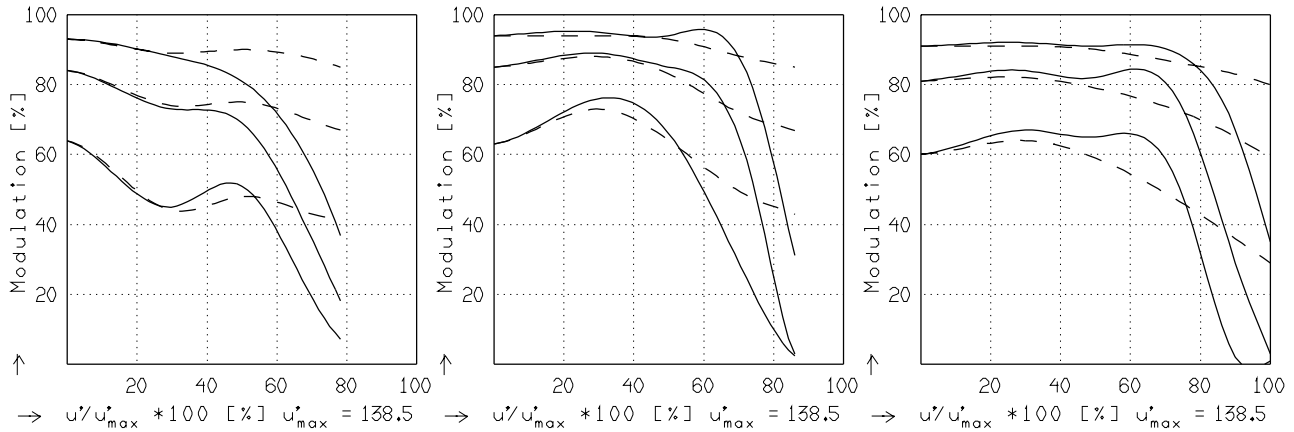

$f' = 180.3$ $k = 5.6$ $1/\beta' = \infty$ $00' = \infty$ $f' = 180.3$ $k = 11.0$ $1/\beta' = \infty$ $00' = \infty$ $f' = 180.3$ $k = 22.0$ $1/\beta' = \infty$ $00' = \infty$

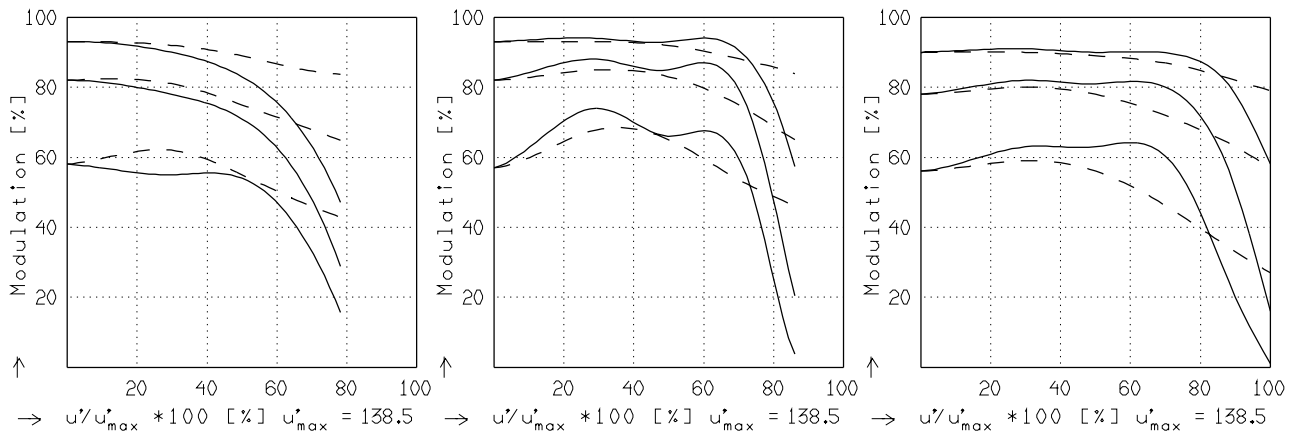

$f' = 180.3$ $k = 5.6$ $1/\beta' = -10.00$ $00' = 2178$. $f' = 180.3$ $k = 11.0$ $1/\beta' = -10.00$ $00' = 2178$. $f' = 180.3$ $k = 22.0$ $1/\beta' = -10.00$ $00' = 2178$.

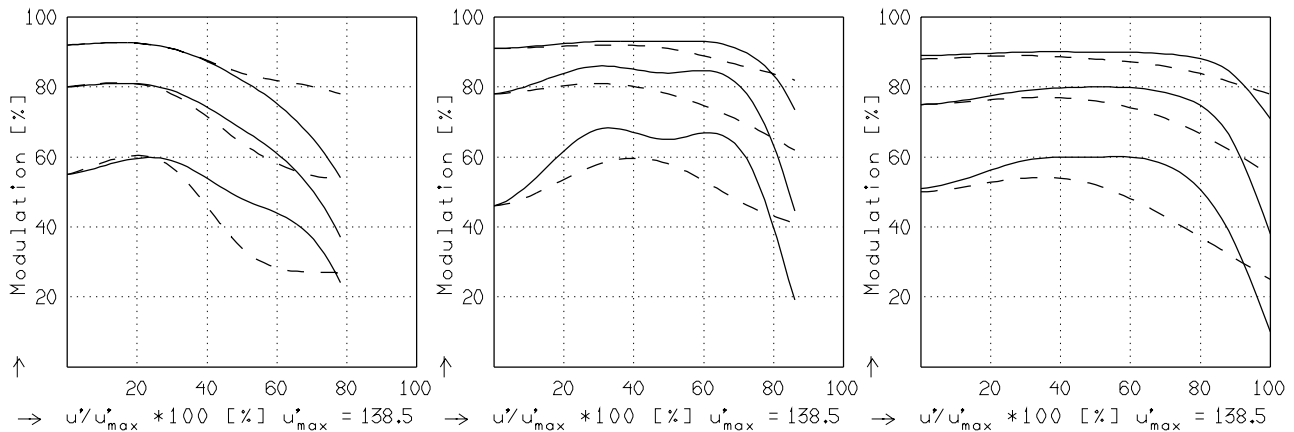

$f' = 180.3$ $k = 5.6$ $1/\beta' = -5.00$ $00' = 1294$. $f' = 180.3$ $k = 11.0$ $1/\beta' = -5.00$ $00' = 1294$. $f' = 180.3$ $k = 22.0$ $1/\beta' = -5.00$ $00' = 1294$.

Fokussierung MTF_{max} bei $k = 5.6$, $R = 20$ 1/mm. $u'/u'_{max} = 0$

47625 181102 Gedruckt in der Bundesrepublik Deutschland