


AP0-DIGITAR 5.6/100


MODULATION with reference to the relative image height

Wavelength λ	[nm]	520	670	620	570	470	420
Spectral weighting	[%]	19.0	10.0	19.0	19.0	19.0	14.0
Spatial frequency R	[1/mm]	20	40	60			
Format	[mm X mm]	63.5	X	63.5			
Diagonal $2u'$	[mm]	90.0					


radial —
tangential - -

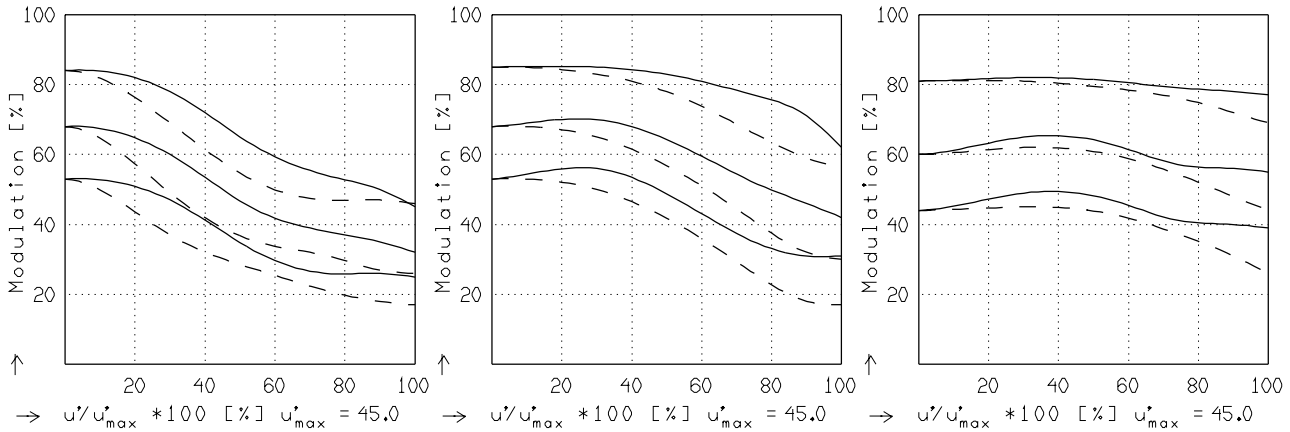

$f' = 100.9$ $f / 5.6$ $1/B' = -20.00$ $00' = 2224.$ $f' = 100.9$ $f / 8.0$ $1/B' = -20.00$ $00' = 2224.$ $f' = 100.9$ $f / 11.0$ $1/B' = -20.00$ $00' = 2224.$

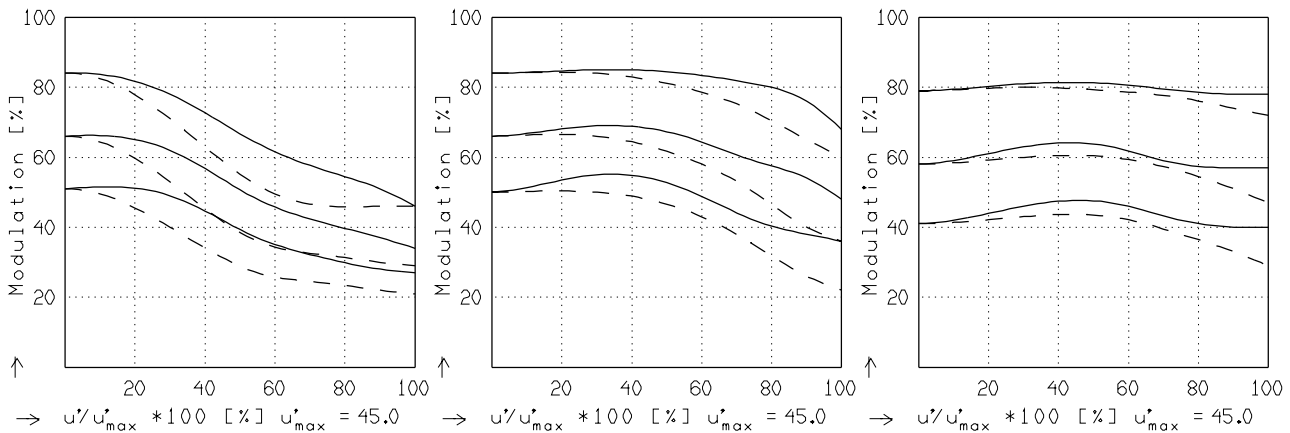

$f' = 100.9$ $f / 5.6$ $1/B' = -10.00$ $00' = 1219.$ $f' = 100.9$ $f / 8.0$ $1/B' = -10.00$ $00' = 1219.$ $f' = 100.9$ $f / 11.0$ $1/B' = -10.00$ $00' = 1219.$

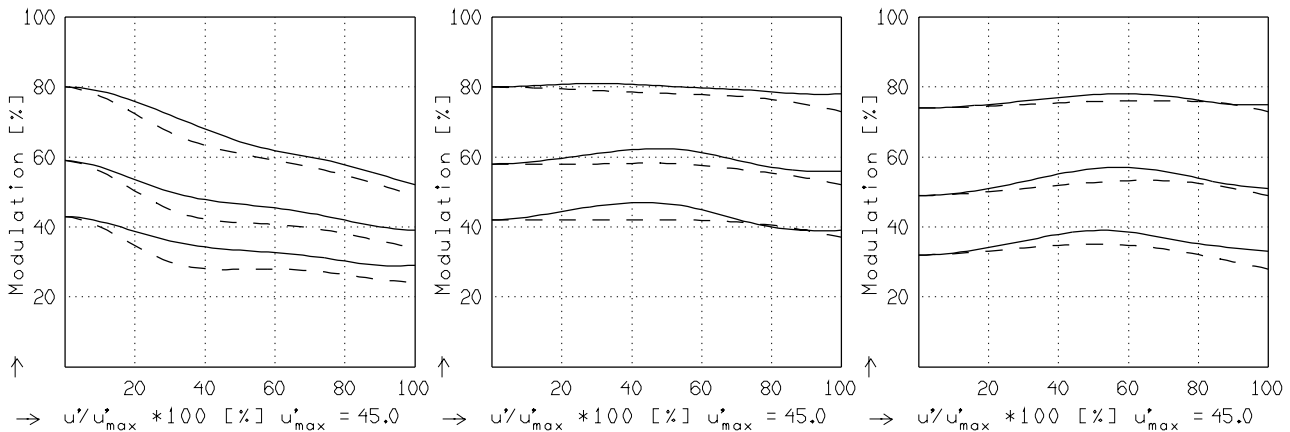

$f' = 100.9$ $f / 5.6$ $1/B' = -3.00$ $00' = 536.$ $f' = 100.9$ $f / 8.0$ $1/B' = -3.00$ $00' = 536.$ $f' = 100.9$ $f / 11.0$ $1/B' = -3.00$ $00' = 536.$

Focusing : MTF_{max} at $f / 5.6$, $R = 60$ 1/mm, $u'/u'_{max} = 0$

-0.200
-0.200
-0.200

-0.180
-0.180
-0.180

-0.155
-0.155
-0.155

-0.130
-0.130
-0.130

-0.105
-0.105
-0.105

46506 91101

Printed in the Federal Republic of Germany