
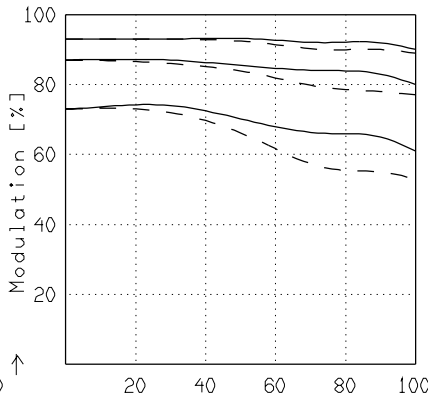
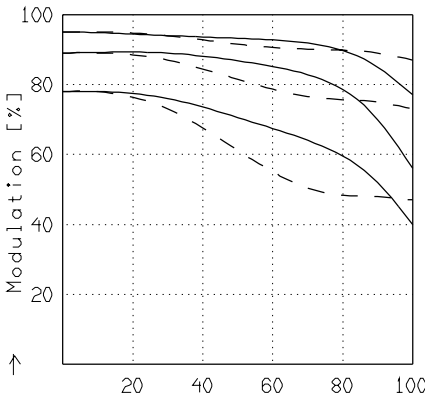


APO-COMPONON 4/45

MODULATION als Funktion der relativen Bildgröße

Wellenlänge λ	[nm] :	546	706	644	480	436	405
Spektrale Gewichtung	[%] :	27.4	12.4	24.1	18.3	12.6	5.2
Ortsfrequenz R	[1/mm] :	10	20	40			
Format	[mm X mm] :	24.0	X	36.0			
Diagonale $2u'$	[mm] :	43.2					




radial —
 tangential - -

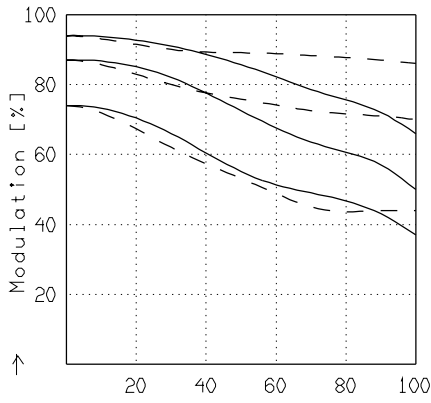

→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 4.0$ $1/\beta' = -25.00$ $00' = 1256.$

→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 5.6$ $1/\beta' = -25.00$ $00' = 1256.$




→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 8.0$ $1/\beta' = -25.00$ $00' = 1256.$

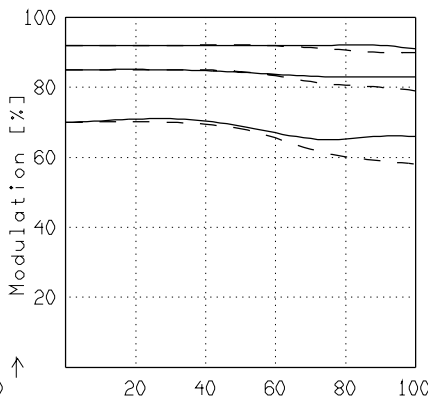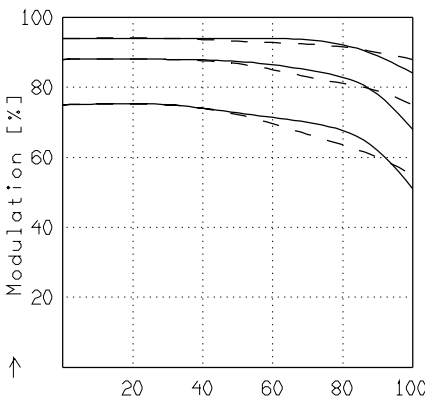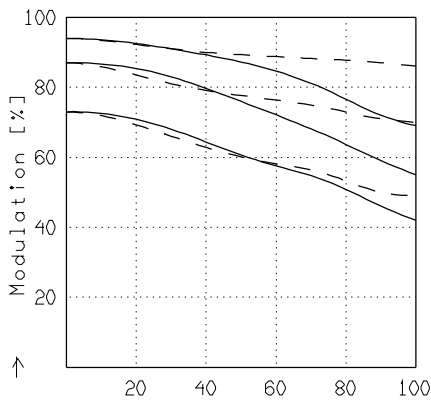

→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 4.0$ $1/\beta' = -6.00$ $00' = 378.$

→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 5.6$ $1/\beta' = -6.00$ $00' = 378.$

→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 8.0$ $1/\beta' = -6.00$ $00' = 378.$

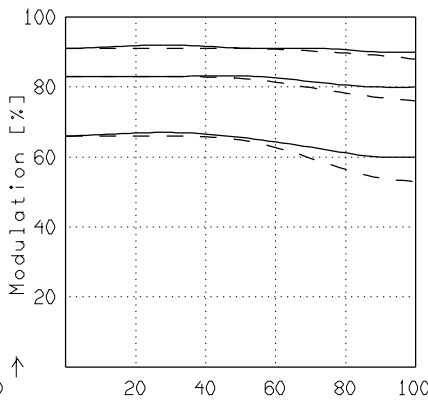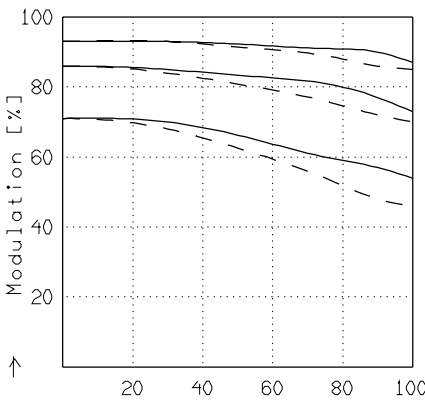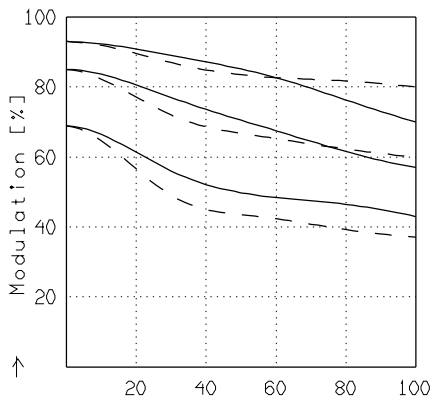

→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 4.0$ $1/\beta' = -3.00$ $00' = 246.$

→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 5.6$ $1/\beta' = -3.00$ $00' = 246.$

→ $u'/u'_{max} * 100$ [%] $u'_{max} = 21.6$
 $f' = 46.5$ $k = 8.0$ $1/\beta' = -3.00$ $00' = 246.$

Fokussierung MTF_{max} bei $k = 4.0$, $R = 20$ 1/mm, $u'/u'_{max} = 0$

4885 20040 Gedruckt in der Bundesrepublik Deutschland