


**APO-COMPONON 4/60**


**MODULATION** als Funktion der relativen Bildgröße

Wellenlänge $\lambda$ [nm] :	546	706	644	480	436	405
Spektrale Gewichtung [%] :	27.4	12.4	24.1	18.3	12.6	5.2
Ortsfrequenz $R$ [1/mm] :	10	20	40			
Format [mm X mm] :	42.0	X	42.0			
Diagonale $2u'$ [mm] :	60.0					


radial —  
 tangential - -

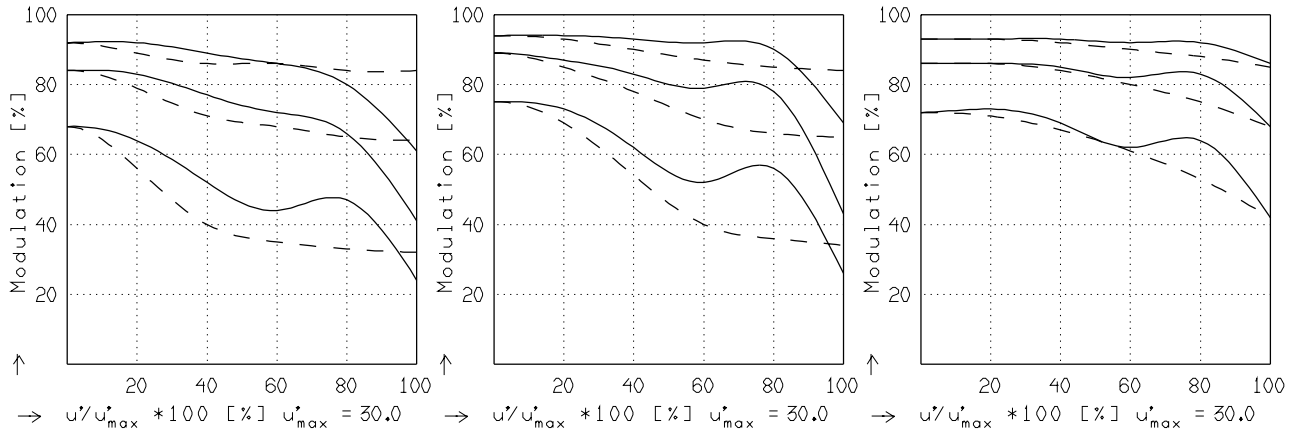

$f' = 59.9$   $k = 4.0$   $1/\beta' = -25.00$   $00' = 1619.$      $f' = 59.9$   $k = 5.6$   $1/\beta' = -25.00$   $00' = 1619.$      $f' = 59.9$   $k = 8.0$   $1/\beta' = -25.00$   $00' = 1619.$

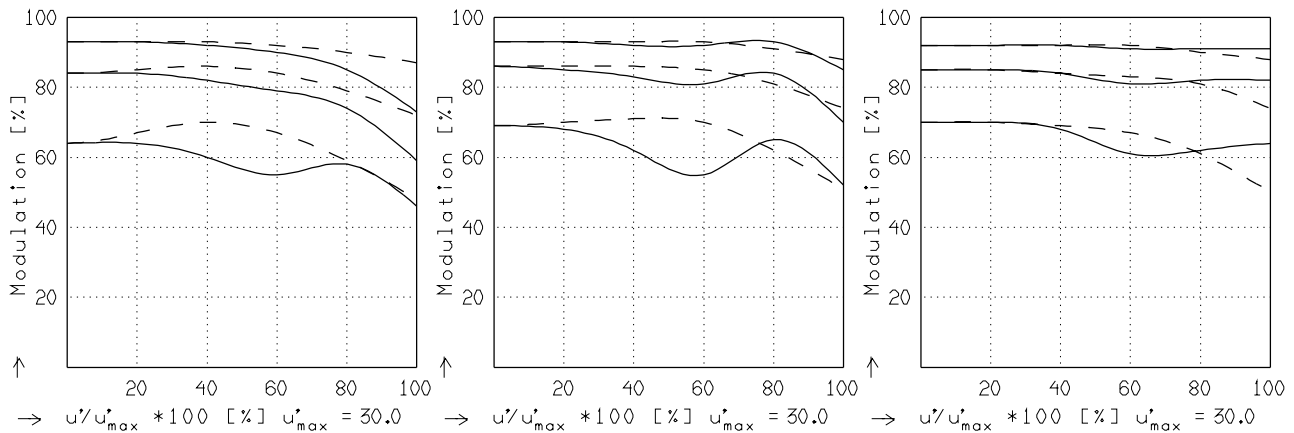

$f' = 59.9$   $k = 4.0$   $1/\beta' = -6.00$   $00' = 488.$      $f' = 59.9$   $k = 5.6$   $1/\beta' = -6.00$   $00' = 488.$      $f' = 59.9$   $k = 8.0$   $1/\beta' = -6.00$   $00' = 488.$

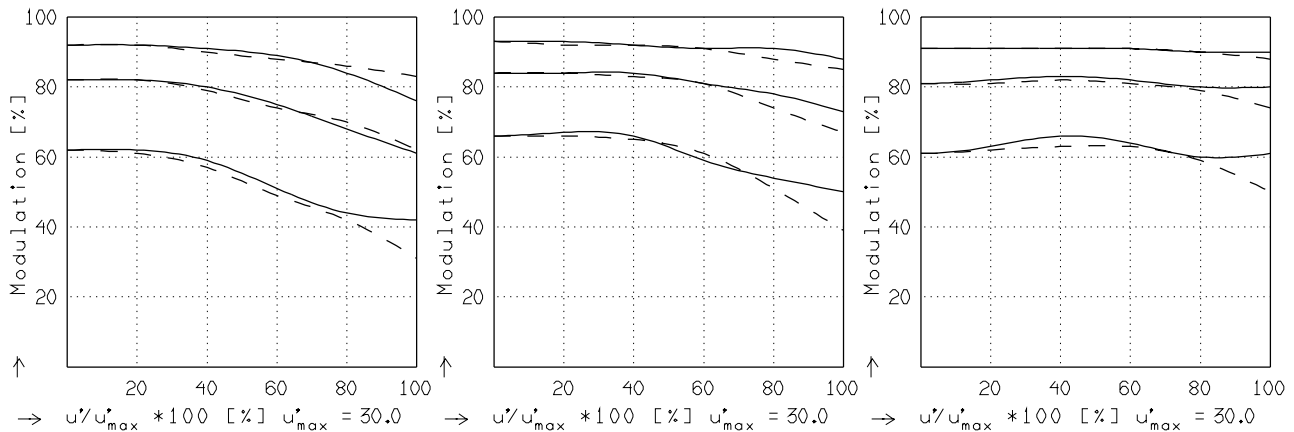

$f' = 59.9$   $k = 4.0$   $1/\beta' = -3.00$   $00' = 318.$      $f' = 59.9$   $k = 5.6$   $1/\beta' = -3.00$   $00' = 318.$      $f' = 59.9$   $k = 8.0$   $1/\beta' = -3.00$   $00' = 318.$

Fokussierung  $MTF_{max}$  bei  $k = 4.0$  ,  $R = 20$  1/mm.  $u'/u'_{max} = 0$

45785 280800 Gedruckt in der Bundesrepublik Deutschland