

# Interference Filter BP 655 nm FWHM 50 nm

Filter type:	Band pass	Surface:	5/2x0.16 <sup>1</sup>
Center wavelength:	655 nm	Wavefront distortion <sup>2</sup> :	1λ
Bandwidth (FWHM):	50 nm	Parallelism:	1 arc minute
Wavelength tolerance:	± 15 nm	Diameter tolerance:	+0 -0.3 mm
Peak transmittance:	> 90 %	Thickness:	2.0 ± 0.2 mm
Blocking:	< 1%		

## Order instructions:

Unmounted filter: IFG – BP – 655 – 50 – *Size*

*Size*: diameter in mm


Mounted filter: IF – BP – 655 – 50 – SH – *Size*

*Size*: Thread of the standard mount SH

Examples:

IFG – BP – 655 – 50 – 24 (unmounted, 24 mm diameter)

IF – BP – 655 – 50 – SH – 27 (mounted for M25.5)

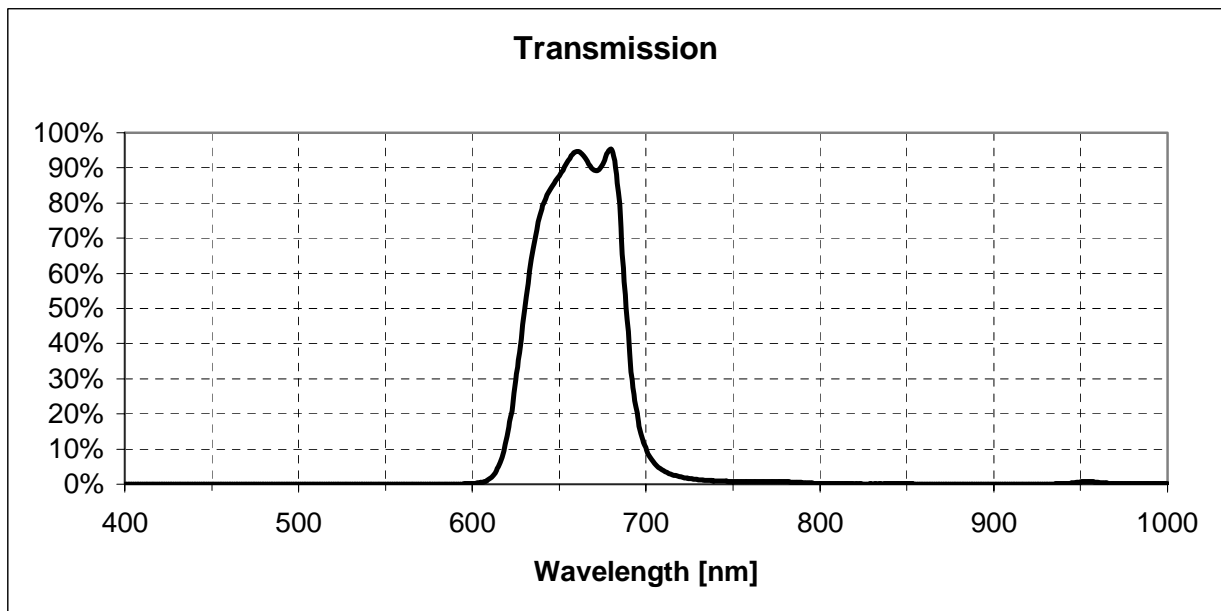

<sup>1</sup> Surface specification according to ISO 10110, quality usually similar to MIL 80-50 scratch-dig or better

<sup>2</sup> per 30mm at 633nm

Jos. Schneider Optische Werke GmbH

Ringstraße 132

55543 Bad Kreuznach

Germany

Phone: +49 671 601-387

Fax: +49 671 601-286

[www.schneiderkreuznach.com/industrialoptics](http://www.schneiderkreuznach.com/industrialoptics)

[industrie@schneiderkreuznach.com](mailto:industrie@schneiderkreuznach.com)

Schneider Optics Inc.

285 Oser Ave,

Hauppauge, NY 11788

USA

Phone: +1 631 761-5000

Fax: +1 631 761-5090

[www.schneideroptics.com/oem](http://www.schneideroptics.com/oem)

[oem@schneideroptics.com](mailto:oem@schneideroptics.com)

Jos. Schneider Optische Werke GmbH is certified ISO 9001.

We accept no responsibility for any errors and reserve the right of modification without further notice.

# xxxxxx, Version 1.0, 17.11.2005

© 2005 Jos. Schneider Optische Werke GmbH