

Interference Filter BP 680 nm FWHM 100 nm

Filter type:	Band pass	Surface:	5/2x0.16 ¹
Center wavelength:	680 nm	Wavefront distortion ² :	1λ
Bandwidth (FWHM):	100 nm	Parallelism:	1 arc minute
Wavelength tolerance:	± 15 nm	Diameter tolerance:	+0 -0.3 mm
Peak transmittance:	> 90 %	Thickness:	2.0 ± 0.2 mm
Blocking:	< 1%		

Order instructions:

Unmounted filter: IFG – BP – 680 – 100 – *Size*

Size: diameter in mm


Mounted filter: IF – BP – 680 – 100 – SH – *Size*

Size: Thread of the standard mount SH

Examples:

IFG – BP – 680 – 100 – 43 (unmounted, 43 mm diameter)

IF – BP – 680 – 50 – SH – 46 (mounted for M46)

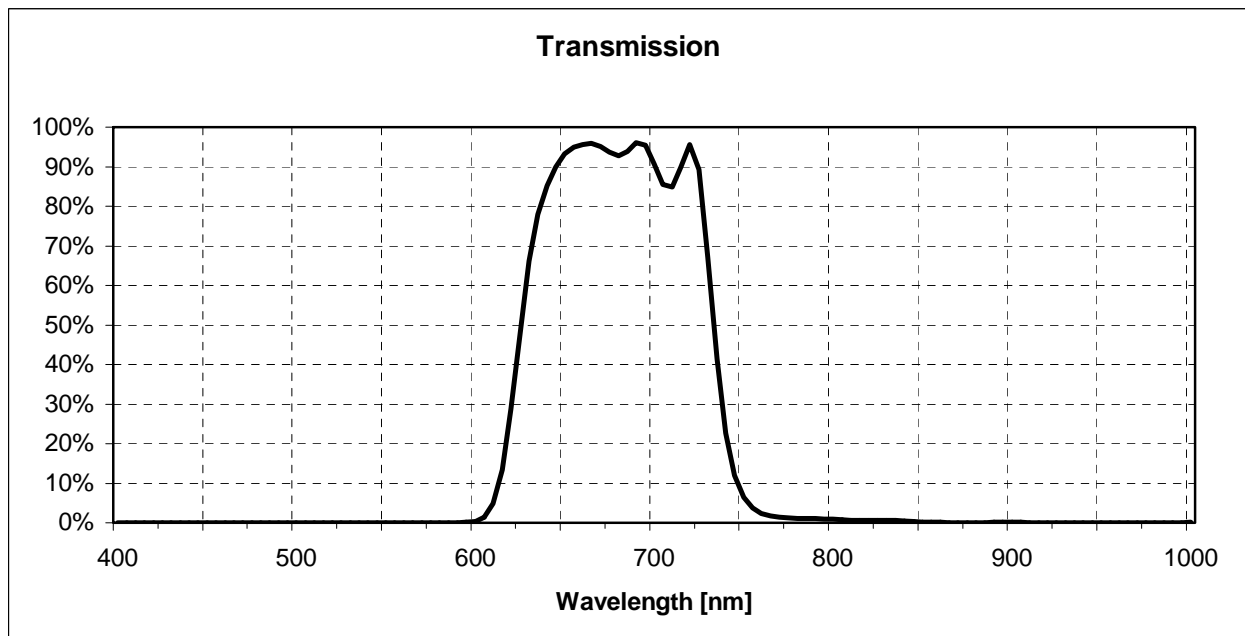

¹ Surface specification according to ISO 10110, quality usually similar to MIL 80-50 scratch-dig or better

² per 30mm at 633nm

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Phone: +49 671 601-387
 Fax: +49 671 601-286
www.schneiderkreuznach.com/industrialoptics
industrie@schneiderkreuznach.com

Schneider Optics Inc.
 285 Oser Ave,
 Hauppauge, NY 11788
 USA
 Phone: +1 631 761-5000
 Fax: +1 631 761-5090
www.schneideroptics.com/oem
oem@schneideroptics.com

Jos. Schneider Optische Werke GmbH is certified ISO 9001.

We accept no responsibility for any errors and reserve the right of modification without further notice.

xxxxxx, Version 1.0, 17.11.2005

© 2005 Jos. Schneider Optische Werke GmbH